

Xylex* Resin X7200MR

Asia Pacific: COMMERCIAL

Mold Release version of X7200

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
MECHANICAL			
Tensile Stress, yld, Type I, 50 mm/min	560	kgf/cm ²	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	570	kgf/cm ²	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	5	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	135	%	ASTM D 638
Tensile Modulus, 50 mm/min	19100	kgf/cm ²	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	850	kgf/cm ²	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	19900	kgf/cm ²	ASTM D 790
Hardness, Shore D, 10S reading	75	-	ASTM D 2240
Tensile Stress, yield, 50 mm/min	55	MPa	ISO 527
Tensile Stress, break, 50 mm/min	56	MPa	ISO 527
Tensile Strain, yield, 5 mm/min	5	%	ISO 527
Tensile Strain, break, 50 mm/min	>150	%	ISO 527
Tensile Modulus, 1 mm/min	2000	MPa	ISO 527
Flexural Stress, break, 2 mm/min	75	MPa	ISO 178
Flexural Modulus, 2 mm/min	2000	MPa	ISO 178
IMPACT			
Izod Impact, notched, 23°C	91	cm-kgf/cm	ASTM D 256
Instrumented Impact Total Energy, 23°C	968	cm-kgf	ASTM D 3763
Izod Impact, notched 80*10*4 +23°C	8	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -10°C	5	kJ/m ²	ISO 180/1A
THERMAL			
Vicat Softening Temp, Rate B/50	115	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm, unannealed	96	°C	ASTM D 648

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.

3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

4) Own measurement according to UL.

Source, GMD, Last Update: 09/29/2005

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. **DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>. AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN.** Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

* Xylex is a trademark of SABIC INNOVATIVE PLASTICS HOLDING BV

© 1997-2007 SABIC INNOVATIVE PLASTICS HOLDING BV. All rights reserved

Xylex* Resin X7200MR

Asia Pacific: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	UNIT	STANDARD
THERMAL			
HDT, 1.82 MPa, 3.2mm, unannealed	90	°C	ASTM D 648
CTE, -40°C to 40°C, flow	1.05E-04	1/°C	ASTM E 831
CTE, -40°C to 40°C, xflow	1.05E-04	1/°C	ASTM E 831
Thermal Conductivity	0.23	W/m-°C	ISO 8302
CTE, 23°C to 60°C, flow	8.E-05	1/°C	ISO 11359-2
CTE, 23°C to 60°C, xflow	8.E-05	1/°C	ISO 11359-2
Ball Pressure Test, approximate maximum	105	°C	IEC 60695-10-2
Vicat Softening Temp, Rate B/120	115	°C	ISO 306
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	99	°C	ISO 75/Ae
PHYSICAL			
Specific Gravity	1.2	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm	0.5 - 0.7	%	GE Method
Mold Shrinkage, xflow, 3.2 mm	0.5 - 0.7	%	GE Method
Melt Flow Rate, 265°C/2.16kg	12	g/10 min	ASTM D 1238
Density	1.18	g/cm ³	ISO 1183
Melt Volume Rate, MVR at 265°C/2.16 kg	12	cm ³ /10 min	ISO 1133
OPTICAL			
Light Transmission	88	%	ASTM D 1003
Haze	1.1	%	ASTM D 1003
Refractive Index	1.557	-	ISO 489
ELECTRICAL			
Volume Resistivity	> 1.E+15	Ohm-cm	ASTM D 257
Surface Resistivity	> 1.E+15	Ohm	ASTM D 257
Comparative Tracking Index (UL) (PLC)	0	PLC Code	UL 746A
FLAME CHARACTERISTICS			
Glow Wire Flammability Index 750°C, passes at	1	mm	IEC 60695-2-12

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.

3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

4) Own measurement according to UL.

Source, GMD, Last Update:09/29/2005

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. **DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>, AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN.** Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

* Xylex is a trademark of SABIC INNOVATIVE PLASTICS HOLDING BV

© 1997-2007 SABIC Innovative Plastics IP BV. All rights reserved

Xylex* Resin X7200MR

Asia Pacific: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	UNIT
Injection Molding		
Drying Temperature	80 - 95	°C
Drying Time	3 - 5	hrs
Drying Time (Cumulative)	8	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	250 - 270	°C
Nozzle Temperature	250 - 270	°C
Front - Zone 3 Temperature	250 - 270	°C
Middle - Zone 2 Temperature	245 - 265	°C
Rear - Zone 1 Temperature	240 - 250	°C
Mold Temperature	45 - 60	°C
Back Pressure	0.2 - 0.5	MPa
Screw Speed	20 - 100	rpm
Shot to Cylinder Size	40 - 80	%
Vent Depth	0.013 - 0.02	mm

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.
All properties, except the melt volume rate are measured on injection moulded samples.
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
4) Own measurement according to UL.

Source, GMD, Last Update: 09/29/2005

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. **DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>, AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN.** Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

* Xylex is a trademark of SABIC INNOVATIVE PLASTICS HOLDING BV

© 1997-2007 SABIC Innovative Plastics IP BV. All rights reserved

Xylex* Resin X7200MR

Asia Pacific: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

Xylex™ X7200MR

Melt Temperature : 280°C

Mold Temperature : 90°C

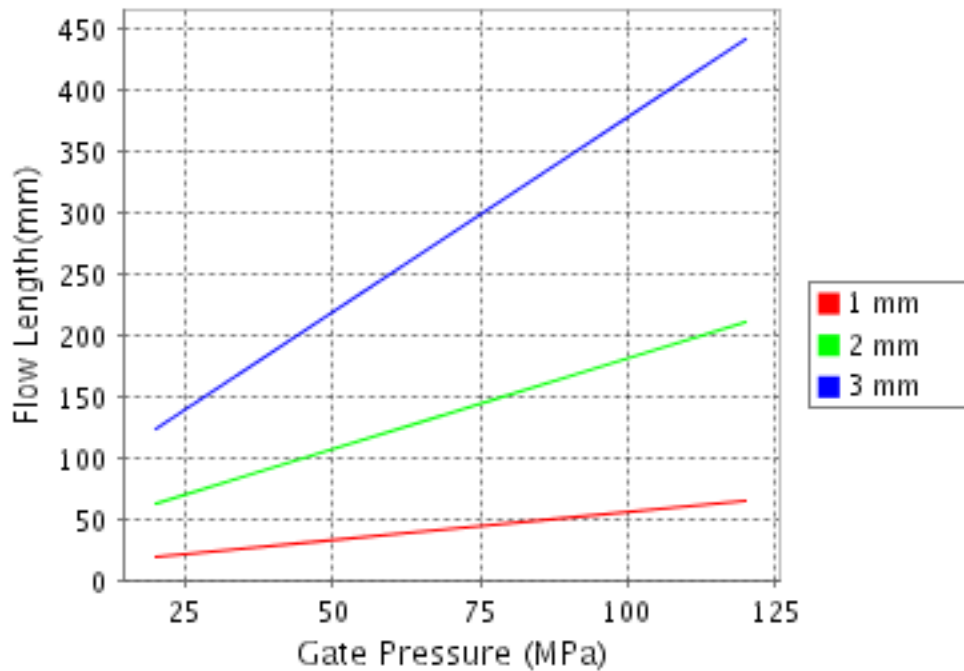

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

® Moldflow is a registered trademark of the Moldflow Corporation.

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.
3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
4) Own measurement according to UL.

Source, GMD, Last Update: 09/29/2005

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>, AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

* Xylex is a trademark of SABIC INNOVATIVE PLASTICS HOLDING BV

© 1997-2007 SABIC Innovative Plastics IP BV. All rights reserved