

## Lexan\* Resin XHT4141

### Europe-Africa-Middle East: COMMERCIAL

XHT4141 is a high flow, high heat polycarbonate copolymer. It is available in a range of opaque and limited transparent colors.

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>MECHANICAL</b>			
Tensile Stress, yld, Type I, 50 mm/min	780	kgf/cm <sup>2</sup>	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	700	kgf/cm <sup>2</sup>	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	7	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	50	%	ASTM D 638
Tensile Modulus, 5 mm/min	27800	kgf/cm <sup>2</sup>	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	1220	kgf/cm <sup>2</sup>	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	26500	kgf/cm <sup>2</sup>	ASTM D 790
Tensile Stress, yield, 50 mm/min	78	MPa	ISO 527
Tensile Stress, break, 50 mm/min	67	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	7	%	ISO 527
Tensile Strain, break, 50 mm/min	50	%	ISO 527
Tensile Modulus, 1 mm/min	2750	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	80	MPa	ISO 178
Flexural Modulus, 2 mm/min	2600	MPa	ISO 178
<b>IMPACT</b>			
Izod Impact, notched, 23°C	9	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	7	cm-kgf/cm	ASTM D 256
Instrumented Impact Total Energy, 23°C	734	cm-kgf	ASTM D 3763
Izod Impact, unnotched 80*10*3 +23°C	NB	kJ/m <sup>2</sup>	ISO 180/1U
Izod Impact, unnotched 80*10*3 -30°C	NB	kJ/m <sup>2</sup>	ISO 180/1U
Izod Impact, notched 80*10*3 +23°C	10	kJ/m <sup>2</sup>	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	8	kJ/m <sup>2</sup>	ISO 180/1A

<sup>1</sup> Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

<sup>2</sup> Only typical data for material selection purpose. Not to be used for part or tool design.

<sup>3</sup> This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.

<sup>4</sup> Own measurement according to UL.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. All information, recommendation or advice given SABIC Innovative Plastics IP BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

\* Lexan is a trademark of SABIC INNOVATIVE PLASTICS HOLDING BV

© 1997-2009 SABIC INNOVATIVE PLASTICS HOLDING BV. All rights reserved

## Lexan\* Resin XHT4141

### Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>IMPACT</b>			
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	11	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	9	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy 23°C, Unnotch Edgew 80*10*3 sp=62mm	NB	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy -30°C, Unnotch Edgew 80*10*3 sp=62mm	NB	kJ/m <sup>2</sup>	ISO 179/1eU
<b>THERMAL</b>			
Vicat Softening Temp, Rate B/50	183	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm, unannealed	174	°C	ASTM D 648
HDT, 1.82 MPa, 3.2mm, unannealed	165	°C	ASTM D 648
CTE, -40°C to 40°C, flow	6.E-05	1/°C	ASTM E 831
CTE, -40°C to 40°C, xflow	6.E-05	1/°C	ASTM E 831
Thermal Conductivity @ 25 °C	0.2	W/m-°C	ASTM C 177
CTE, -40°C to 40°C, flow	6.E-05	1/°C	ISO 11359-2
CTE, -40°C to 40°C, xflow	6.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	Pass	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	183	°C	ISO 306
Vicat Softening Temp, Rate B/120	181	°C	ISO 306
HDT/Bf, 0.45 MPa Flatw 80*10*4 sp=64mm	173	°C	ISO 75/Bf
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	162	°C	ISO 75/Af
Relative Temp Index, Elec	150	°C	UL 746B
Relative Temp Index, Mech w/impact	130	°C	UL 746B
Relative Temp Index, Mech w/o impact	150	°C	UL 746B
Metallized Haze Onset	175	°C	SABIC Method
<b>PHYSICAL</b>			
Specific Gravity	1.2	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm	0.6 - 0.95	%	SABIC Method

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.

3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.

4) Own measurement according to UL.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved

## Lexan\* Resin XHT4141

### Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>PHYSICAL</b>			
Melt Flow Rate, 330°C/2.16 kgf	25	g/10 min	ASTM D 1238
Density	1.21	g/cm <sup>3</sup>	ISO 1183
Water Absorption, (23°C/sat)	0.5	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.25	%	ISO 62
Melt Volume Rate, MVR at 330°C/2.16kg	24	cm <sup>3</sup> /10 min	ISO 1133
<b>ELECTRICAL</b>			
Volume Resistivity	>1.E+17	Ohm-cm	ASTM D 257
Surface Resistivity	>1.E+17	Ohm	ASTM D 257
Relative Permittivity, 100 Hz	3.12	-	ASTM D 150
Relative Permittivity, 1 MHz	3.02	-	ASTM D 150
Hot Wire Ignition (PLC)	3	PLC Code	UL 746A
High Ampere Arc Ign, surface (PLC)	0	PLC Code	UL 746A
<b>FLAME CHARACTERISTICS</b>			
UL Recognized, 94HB Flame Class Rating (3)	1.5	mm	UL 94
UL Recognized, 94HB Flame Class Rating 2nd value (3)	3	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	3	mm	IEC 60695-2-12
Glow Wire Ignitability Temperature, 3.0 mm	875	°C	IEC 60695-2-13

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.

3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.

4) Own measurement according to UL.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved

## Lexan\* Resin XHT4141

### Europe-Africa-Middle East: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	UNIT
<b>Injection Molding</b>		
Drying Temperature	135	°C
Drying Time	4 - 6	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	310 - 355	°C
Nozzle Temperature	305 - 350	°C
Front - Zone 3 Temperature	310 - 355	°C
Middle - Zone 2 Temperature	310 - 345	°C
Rear - Zone 1 Temperature	305 - 330	°C
Mold Temperature	95 - 150	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	40 - 90	rpm
Shot to Cylinder Size	40 - 60	%
Vent Depth	0.025 - 0.076	mm

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.  
All properties, except the melt volume rate are measured on injection moulded samples.  
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA. All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible or liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection.

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved

**Lexan\* Resin XHT4141**

**Europe-Africa-Middle East: COMMERCIAL**


**CALCULATED FLOW LENGTH INDICATION**

**Moldflow® Radial Flow Analysis**

**Lexan® XHT4141**

**Melt Temperature : 345°C**

**Mold Temperature : 115°C**

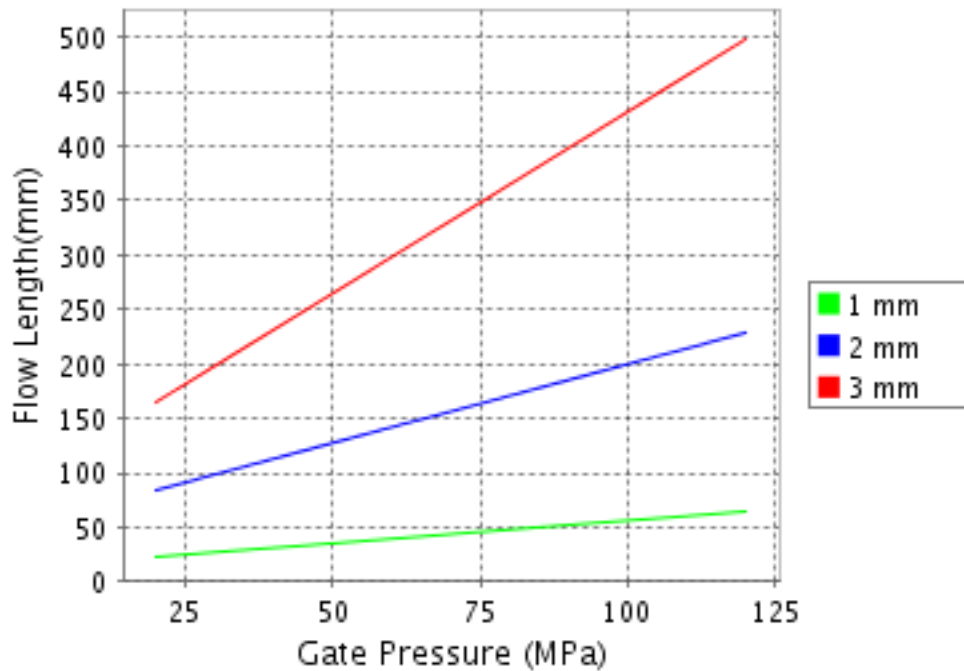

**Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.**

**® Moldflow is a registered trademark of the Moldflow Corporation.**

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given by SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products by the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2009 SABIC Innovative Plastics IP BV. All rights reserved