

## Lexan\* Resin DMX2415

### Americas: COMMERCIAL

Lexan\* DMX2415 is a polycarbonate resin with improved scratch resistance. Lexan\* DMX2415 is available in transparent, translucent, and opaque colors.

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>MECHANICAL</b>			
Tensile Stress, yld, Type I, 50 mm/min	810	kgf/cm <sup>2</sup>	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	660	kgf/cm <sup>2</sup>	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	7	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	70	%	ASTM D 638
Tensile Modulus, 50 mm/min	29500	kgf/cm <sup>2</sup>	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	1220	kgf/cm <sup>2</sup>	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	26500	kgf/cm <sup>2</sup>	ASTM D 790
Hardness, Rockwell L	108	-	ASTM D 785
Hardness, Rockwell M	93	-	ASTM D 785
Taber Abrasion, CS-17, 1 kg	10	mg/1000cy	ASTM D 1044
Taber Abrasion, CS-17, 1 kg	10	mg/1000cy	SABIC Method
Tensile Stress, yield, 50 mm/min	80	MPa	ISO 527
Tensile Stress, break, 50 mm/min	60	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	7	%	ISO 527
Tensile Strain, break, 50 mm/min	40	%	ISO 527
Tensile Modulus, 1 mm/min	2450	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	108	MPa	ISO 178
Flexural Modulus, 2 mm/min	2450	MPa	ISO 178
Hardness, H358/30	128	MPa	ISO 2039-1
Pencil Hardness test, 1kgf	H	-	ASTM D 3363
Erichson scratch depth, 6N	14	micrometer	SABIC Method

1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.  
All properties, except the melt volume rate are measured on injection moulded samples.  
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

**DISCLAIMER:** THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com> AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

\* Lexan is a trademark of SABIC INNOVATIVE PLASTICS HOLDING BV

© 1997-2010 SABIC INNOVATIVE PLASTICS HOLDING BV. All rights reserved

**Lexan\* Resin DMX2415**  
**Americas: COMMERCIAL**

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>IMPACT</b>			
Izod Impact, unnotched, 23°C	NB	cm-kgf/cm	ASTM D 4812
Izod Impact, notched, 23°C	3	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	3	cm-kgf/cm	ASTM D 256
Instrumented Impact Total Energy, 23°C	305	cm-kgf	ASTM D 3763
Izod Impact, unnotched 80*10*3 +23°C	NB	kJ/m <sup>2</sup>	ISO 180/1U
Izod Impact, unnotched 80*10*3 -30°C	45	kJ/m <sup>2</sup>	ISO 180/1U
Izod Impact, notched 80*10*3 +23°C	5	kJ/m <sup>2</sup>	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	4	kJ/m <sup>2</sup>	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	3	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	3	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy 23°C, Unnotch Edgew 80*10*3 sp=62mm	NB	kJ/m <sup>2</sup>	ISO 179/1eU
Charpy -30°C, Unnotch Edgew 80*10*3 sp=62mm	47	kJ/m <sup>2</sup>	ISO 179/1eU
<b>THERMAL</b>			
Vicat Softening Temp, Rate B/50	139	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm, unannealed	133	°C	ASTM D 648
HDT, 1.82 MPa, 3.2mm, unannealed	119	°C	ASTM D 648
CTE, -40°C to 95°C, flow	7.E-05	1/°C	ASTM E 831
CTE, -40°C to 95°C, xflow	7.E-05	1/°C	ASTM E 831
Specific Heat	1.4	J/g-°C	ASTM C 351
Thermal Conductivity	0.2	W/m-°C	ASTM C 177
Thermal Conductivity	0.2	W/m-°C	ISO 8302
CTE, 23°C to 80°C, flow	7.E-05	1/°C	ISO 11359-2
CTE, 23°C to 80°C, xflow	7.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.  
All properties, except the melt volume rate are measured on injection moulded samples.  
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

**PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.**

**DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>. AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN.** Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed Seller. No statement Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2010 SABIC Innovative Plastics IP BV. All rights reserved

**Lexan\* Resin DMX2415**  
**Americas: COMMERCIAL**

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>THERMAL</b>			
Ball Pressure Test, approximate maximum	140	°C	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	138	°C	ISO 306
Vicat Softening Temp, Rate B/120	140	°C	ISO 306
HDT/Bf, 0.45 MPa Flatw 80*10*4 sp=64mm	131	°C	ISO 75/Bf
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	118	°C	ISO 75/Af
<b>PHYSICAL</b>			
Specific Gravity	1.2	-	ASTM D 792
Specific Volume	0.85	cm <sup>3</sup> /g	ASTM D 792
Density	1.17	g/cm <sup>3</sup>	ASTM D 792
Water Absorption, 24 hours	0.08	%	ASTM D 570
Water Absorption, equilibrium, 23C	0.28	%	ASTM D 570
Water Absorption, 50% RH, equilib	0.13	%	ASTM D 570
Moisture Absorption, 50% RH, 24 hrs	0.04	%	ASTM D 570
Mold Shrinkage, flow, 3.2 mm (5)	0.5 - 0.8	%	SABIC Method
Melt Flow Rate, 300°C/1.2 kgf	14.5	g/10 min	ASTM D 1238
Density	1.17	g/cm <sup>3</sup>	ISO 1183
Water Absorption, (23°C/sat)	0.27	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.13	%	ISO 62
Melt Volume Rate, MVR at 300°C/1.2 kg	13	cm <sup>3</sup> /10 min	ISO 1133
Oxygen Permeability (23°C)	2	cm <sup>3</sup> -cm/cm <sup>2</sup> -day-atm	ASTM F 1307
Water Vapor Transmission Rate (38-°C/100%RH)	0.9	g-mm/m <sup>2</sup> -day	ASTM F 1249
<b>OPTICAL</b>			
Light Transmission, 2.54 mm	88	%	ASTM D 1003
Haze, 2.54 mm	<0.8	%	ASTM D 1003
Refractive Index	1.584	-	ASTM D 542
Refractive Index	1.584	-	ISO 489
<b>ELECTRICAL</b>			
Volume Resistivity	>1.E+17	Ohm-cm	ASTM D 257
Relative Permittivity, 50/60 Hz	2.9	-	ASTM D 150

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>. AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed Seller. No statement Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2010 SABIC Innovative Plastics IP BV. All rights reserved

**Lexan\* Resin DMX2415**  
**Americas: COMMERCIAL**

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	UNIT	STANDARD
<b>ELECTRICAL</b>			
Relative Permittivity, 1 MHz	2.8	-	ASTM D 150
Comparative Tracking Index (UL) {PLC}	2	PLC Code	UL 746A
<b>FLAME CHARACTERISTICS</b>			
UL Recognized, 94HB Flame Class Rating (3)	0.4	mm	UL 94

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

**PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.**

**DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>. AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN.** Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed Seller. No statement Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2010 SABIC Innovative Plastics IP BV. All rights reserved

**Lexan\* Resin DMX2415**  
**Americas: COMMERCIAL**

PROCESSING PARAMETERS	TYPICAL VALUE	UNIT
<b>Injection Molding</b>		
Drying Temperature	120	°C
Drying Time	3 - 4	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	295 - 315	°C
Nozzle Temperature	290 - 310	°C
Front - Zone 3 Temperature	295 - 315	°C
Middle - Zone 2 Temperature	280 - 305	°C
Rear - Zone 1 Temperature	260 - 280	°C
Hopper Temperature	60 - 80	°C
Mold Temperature	70 - 95	°C

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.  
All properties, except the melt volume rate are measured on injection moulded samples.  
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

**PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.**

**DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>. AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN.** Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed Seller. No statement Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.


SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2010 SABIC Innovative Plastics IP BV. All rights reserved

**Lexan\* Resin DMX2415**  
**Americas: COMMERCIAL**

**CALCULATED FLOW LENGTH INDICATION**  
**Moldflow® Radial Flow Analysis**  
**Lexan\* DMX2415**  
**Melt Temperature : 290°C**  
**Mold Temperature : 90°C**

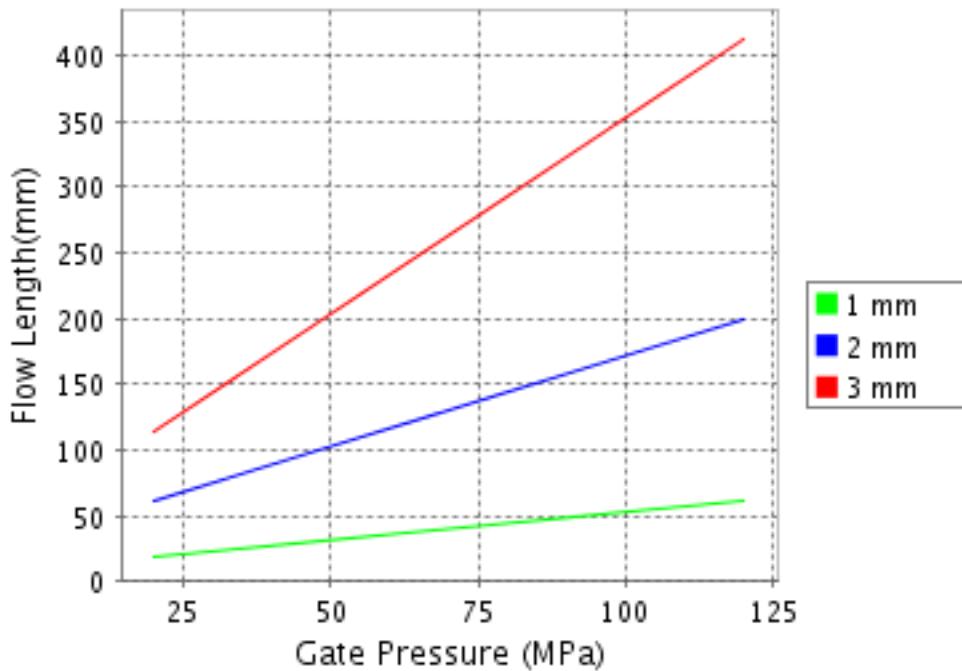

**Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.**  
**® Moldflow is a registered trademark of the Moldflow Corporation.**

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
 3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
 4) Own measurement according to UL.  
 5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source, GMD, Last Update:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA.

DISCLAIMER : THE MATERIALS, PRODUCTS AND SERVICES OF SABIC INNOVATIVE PLASTICS HOLDING BV, ITS SUBSIDIARIES AND AFFILIATES ("SELLER"), ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH CAN BE FOUND AT <http://www.sabic-ip.com>. AND ARE AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION OR RECOMMENDATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SELLER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SELLER'S PRODUCTS, SERVICES OR RECOMMENDATIONS. EXCEPT AS PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS PRODUCTS OR SERVICES DESCRIBED HEREIN. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed Seller. No statement Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC Innovative Plastics is a trademark of SABIC Holding Europe BV

\* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2010 SABIC Innovative Plastics IP BV. All rights reserved